




999.00 EUR
incl. 19% VAT, plus [shipping](#)

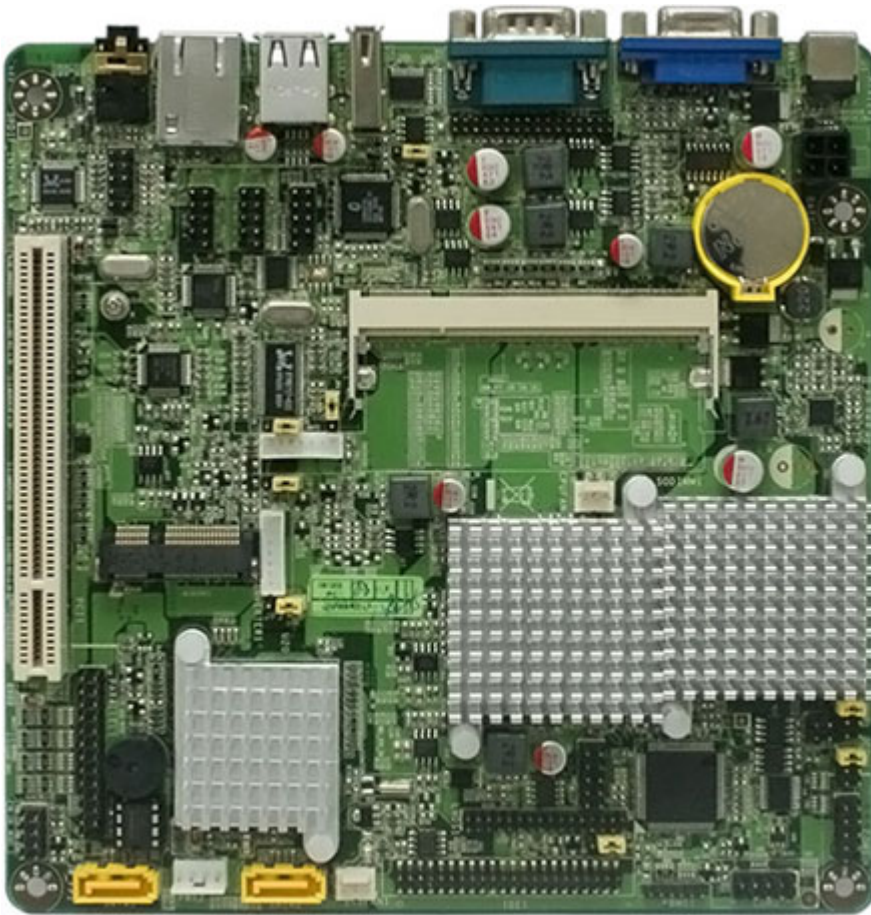

Support:  [Specifications \[EN\]](#)

- INTEL® 945GSE + ICH7M Chipset
- Support INTEL® Atom N270 CPU(45nm,512K Cache, 1.60 GHz, 533 MHz FSB)
- Build-in INTEL®GMA 950 Graphics Core
- **Support CPU Smart FAN**
- Integrated LVDS support 24-bit TFT LCD
- Supports 1x Gigabit LAN
- **Supports ACPI S3 Function**
- Support Watch dog Technology
- Mini-ITX Form Factor(17cm x 17cm)
- CPU
 - INTEL ® Atom N270 CPU(45nm,512K Cache, 1.60 GHz, 533 MHz FSB)
- Chipset
 - INTEL® 945GSE + ICH7M chipset
 - Build-in INTEL® GMA 950 Graphics Core(Share Memory Size: 128/224MB)
 - Front Side Bus 533MHz
- Memory
 - 1 * SO-DIMM Sockets for un-buffered Single Channel DDR2 533/400 SDRAM up to 2 GB
- Expansion Slots
 - 1 * PCI slot
 - 1 * MINI PCI-E
- Storage
 - 2 * Serial ATA2 3Gb/s connectors
 - 1 * Ultra DMA 100 / 66 IDE connector
- Audio
 - Realtek ALC662 6-Channel HD Audio CODEC
- Ethernet LAN
 - Realtek RTL8111DL PCI-E Gigabit Ethernet LAN
- LVDS
 - Onboard 24-bit&8-bit dual channel LVDS connector
- USB
 - Embedded 7 * USB 2.0/1.1

-
- Special Features
 - Intel Diamond Ville Platform
 - Support ACPI S3
 - Support CPU Smart FAN
 - Support Watch Dog
 - Rear Panel I / O
 - 3 * USB 2.0/1.1 ports
 - 1 * RJ-45 port
 - 1 * SPDIF OUT
 - 1 * VGA port
 - 1 * COM port
 - 1 * 12V DC in
 - Internal I / O
 - 2 * USB 2.0/1.1 headers for 4 USB 2.0 ports
 - 1 * KB/MS headers
 - NB / Chassis Fan connectors;
 - 2 * LVDS headers & 1 * GPIO header & 1 Parallel headers
 - 3 * COM headers (COM1 for RS-422/485)
 - 1 * AUDIO header
 - BIOS
 - Functional
 - Form Factor
 - AMI Flash ROM
 - ATM, Security, Digital Signage, POS, General Application, Transportation
 - Mini ITX Form Factor(170mm x 170mm)

Product Accessories

- COM cable
- Manual
- CD
- 2x SATA cable
- I/O shield
- 1x IDE cable
- Power cable