


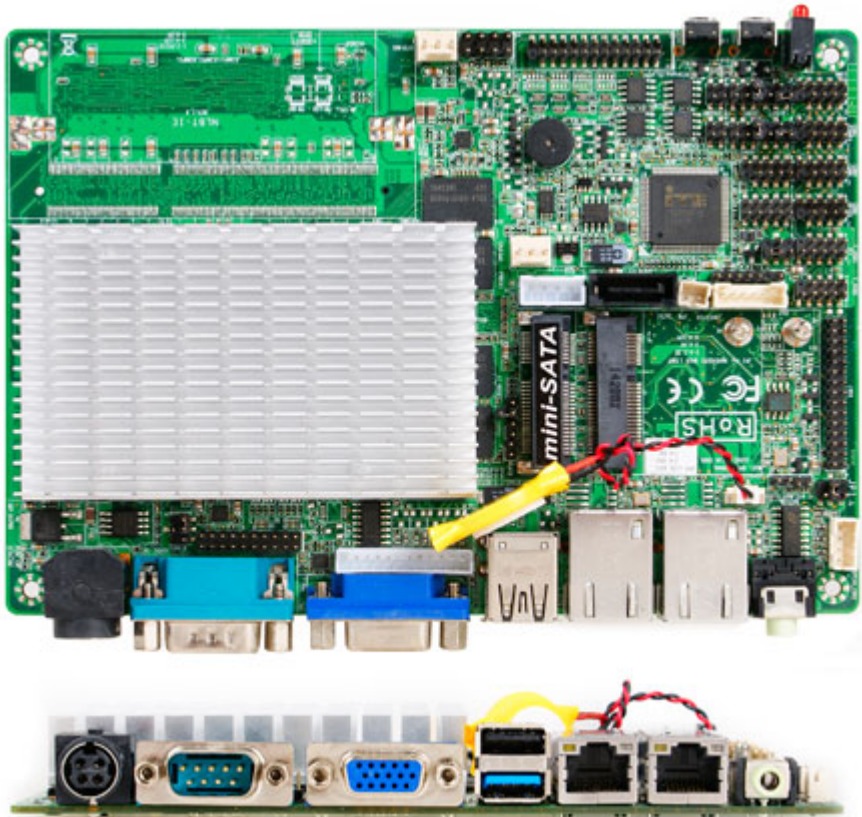

339.00 EUR  
incl. 19% VAT, plus [shipping](#)

- [INTEL®](#) BayTrail--M N2930 SOC Chipset
- Onboard INTEL® BayTrail-M N2930 1.83GHz Quad Cores CPU
- Support DirectX 11 3D Graphics Acceleration
- On Board SAMSUNG 4G/1333MHz DDR3L DRAM
- Integrated HD Audio CODEC
- Support 2\*PCI Express Gigabit LAN
- Support SIM Card Socket
- Support 24-bit Dual channel
- Onboard 1\*MiniPCI-E connector(Half size)
- Onboard 1 \*M- SATA connector(Full size)
- Support G-sensor Function
- Support TP Connector
- All Tantalum Capacitor design
- Support power onboard(wide voltage input :9~24V)
- [EPIC](#) Form Factor(165mm X115mm)

|                        |                                                                                                                                              |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CPU</b>             | <ul style="list-style-type: none"> <li>On board INTEL® BayTrail-M N2930 1.83GHz Quad Cores CPU</li> <li>2 Phase CPU Power Support</li> </ul> |
| <b>Chipset</b>         | INTEL® BayTrail-M N2930 SOC Chipset                                                                                                          |
| <b>I.O Chipset</b>     | ITE IT8786E                                                                                                                                  |
| <b>Memory</b>          | Onboard SAMSUNG 4G/1333MHz DDR3L DRAM                                                                                                        |
| <b>Expansion Slots</b> | 1* Mini PCI-E connector(Half size)                                                                                                           |
| <b>Storage</b>         | <ul style="list-style-type: none"> <li>1* Serial ATA2 3Gb/s connector</li> <li>1* <a href="#">M-SATA Connector</a>(Full size)</li> </ul>     |
| <b>Audio</b>           | <ul style="list-style-type: none"> <li>ALC887 Audio CODEC</li> <li>HD Audio CODEC</li> </ul>                                                 |
| <b>Ethernet LAN</b>    | 2*INTEL® i211AT GIGALAN                                                                                                                      |
| <b>LVDS</b>            | Onboard 24-bit Dual channel                                                                                                                  |

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| • <b>USB</b>              | <ul style="list-style-type: none"> <li>• 5* USB 2.0/1.1(1 distribute in back panel, 4 distribute in mid-board)</li> <li>• 1* USB3.0 (distribute in back panel)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| • <b>Special Features</b> | <ul style="list-style-type: none"> <li>• Support G-Sensor Function</li> <li>• Support TP Connector</li> <li>• Support CPU Smart Fan</li> <li>• Support Watch dog Technology</li> <li>• Support GPIO Technology</li> <li>• Support Power Onboard (9~24v wide voltage input)</li> <li>• Support VGA header</li> <li>• Support 1*20-pin HDMI header</li> <li>• Support SIM Card socket</li> <li>• Support 2*RS422/RS485/RS232 for COM2&amp;COM3</li> <li>• Support Amplifier function(3W)</li> <li>• Support Power&amp; Reset Button</li> <li>• All Tantalum Capacitor design</li> <li>• <a href="#">All Power Pack MOSFET design</a></li> </ul>    |
| • <b>Back Panel I / O</b> | <ul style="list-style-type: none"> <li>• 1* DC-JACK(Co-lay 4-pin Power connector)</li> <li>• 1* USB2.0/1.1 port</li> <li>• 1* USB3.0 port</li> <li>• 2* RJ-45 ports</li> <li>• 1* COM port</li> <li>• 1* Line-out connector</li> <li>• 1* VGA port</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                    |
| • <b>Internal I / O</b>   | <ul style="list-style-type: none"> <li>• 2* USB 2.0/1.1 headers for 4 USB 2.0/1.1 ports</li> <li>• 1* CPU / Chassis Fan connector</li> <li>• 2* System Fan connectors</li> <li>• 5* COM headers (Support RS485/RS422/RS232 for COM2&amp;COM3)</li> <li>• 1* Parallel header</li> <li>• 1* 4-pin SATA Power connector</li> <li>• 1* 12-pin VGA header</li> <li>• 1* 20-pin HDMI header</li> <li>• 1* 24-bit Dual Channel LVDS header</li> <li>• 1* 4-pin Amplifier header</li> <li>• 1* GPIO header</li> <li>• 1* Mini PCI-e connector</li> <li>• 1* M-SATA connector</li> <li>• 1* SATA2.0 connectors</li> <li>• 1* 4-pin PS/2 header</li> </ul> |
| • <b>BIOS</b>             | <ul style="list-style-type: none"> <li>• AMI 64MB DIP Flash ROM</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| • <b>Form Factor</b>      | <ul style="list-style-type: none"> <li>• EPIC Form Factor(165mm X 115mm)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |